




SAILLAGE PET DTF FILM TECHNICAL DATA

SAILLAGE PET DTF transfer film is specially designed for customized fashion, like Cotton, Polyester, Nylon, Leather, Mixed fabric, Metal, Plastic etc. It is made of 100% pure pet, free of formaldehyde and phthalate, and chrome stearate, with an innovative coating developed by our own technicians. Our DTF coating holds 100% ink loading, minimalizes dye migration, preserves colors better. Customers could peel it instant, hot or cold easily as you want, without any color change or peeling problem.

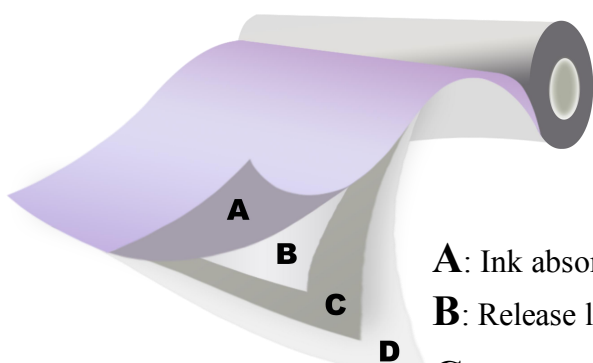

A: Ink absorption, water-based, 100% ink loading

B: Release layer, water-based coating, eco-friendly

C: PET film, 100% pure, offers both mechanical strength and heat resistance

D: Back coating, Anti-slip, Anti-static, Anti-adhesion, Anti-blocking and scratch-resistant.

KEY SPECIFICATION :


Thickness	PET 75um (Double Sided)
Weight	112gsm
Ink Loading	100%
Printing Technology	Water-based inkjet printing
Ink Type	Pigment Ink(C/M/Y/BK/WHITE)
Peel Type	Instant/Hot/Cold
Release Force	8-15gf
Eco-Friendly	Yes
Certificates	OEKO-TEX
Application	Cotton, Polyester, Nylon, Leather, Mixed fabric, Metal, Plastic etc



KEY FEATURES

- THE MOST Vibrant color in the market.
- NEVER stick powder outside the prints.
- Peel Effortless whenever you want.
- NO color change no matter peel instant/hot/cold.
- NO ink & moisture bleeding problems.
- Work with any DTF printers.
- Long washable life, >50 times.
- High elasticity, stretch-resistant (no cracking).
- See through for easy positioning.

FORMAT



- 30cm x 100m/11.8" x 328ft
- 40cm x 100m/15.7" x 328ft
- 60cm x 100m/23.6" x 328ft
- 80cm x 100m/31.5" x 328ft
- 90cm x 100m/35.4" x 328ft
- 120cm x 100m/47.2" x 328ft
- A4/8.27" x 16.53
- 30cm x 50m/11.8" x 164ft
- 40cm x 50m/15.7" x 164ft
- 60cm x 50m/23.6" x 164ft
- 80cm x 50m/31.5" x 164ft
- 90cm x 50m/35.4" x 164ft
- 120cm x 50m/47.2" x 164ft
- A3/11.69" x 16.53

INSTRUCTION FOR USE

- Humidity: 50-60% RH
- Temp: 10-30°C/50-86°F
- Pre-heat temp: 40-60°C/104-140°F
- Drying temp: 130-145°C/266-293°F
- Press temp: 140-155°C/284-311°F
- Press time: 8s

INSTRUCTION FOR STORAGE

- Humidity: 40-80% RH
- Temp: 5-30°C, 41-86°F
- Storage period: 1 year
- Storage method: in unopened original packing

THE PROCESS

1: Mirror Print the film



2: Evenly coat the film with powder



3: Dry the film & powder




6: Rrepress the garment



5: Remove the film



4: Heat press the film to garment

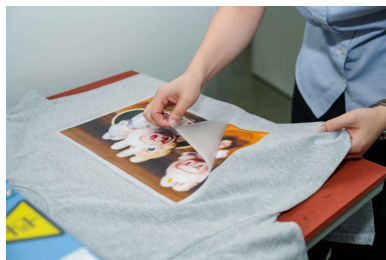

Note: The information contained in this technical data sheet are based on our present experience and knowledge. In consideration of the various factors which can effect the results achieved in the final application, Saillage doesn't take any responsibility for an unproper use of the product by the user which can violate or damage rights of third parties.



PET DTF FILM
白墨烫画膜

CEL:86-15879156891 WWW.SAILLAGE.COM

